

SOFTENER

MODEL NO. MT285/17T-120

CAPACITY:

MIN. 96,000 grs. @ 10 lbs./cu.ft.
 MAX. 120,000 grs. @ 15 lbs./cu.ft.

FLOW RATE:

NORMAL 20 gpm.
 PEAK 41 gpm.
 BACKWASH 7 gpm.

TANK SIZE: 16" x 65"
 COMPOSITE

MEDIA:

RESIN 4 cu.ft.
 GRAVEL 75 lbs.

PIPE SIZE:

INLET 1-1/2"
 OUTLET 1-1/2"
 DRAIN 1"
 BRINE 1/2"

BRINE TANK

MODEL NO. BT2450R-454HF-5

TANK SIZE: 24"x 50"
 POLYETHYLENE

CAPACITY:

100 gals.
 900 lbs./salt

BRINE VALVE: 454HF

BRINE WELL: 5"


WEIGHT (APPROX)

TOTAL SHIPPING 440 lbs.
 TOTAL OPERATING 1375 lbs.

NOTE:


ALL DASHED PIPE, VALVES,
 AND FITTINGS NOT PROVIDED
 BY NELSEN CORPORATION.

PEAK FLOWS ARE NOT
 RECOMMENDED FOR EXTENDED
 PERIODS OF TIME.

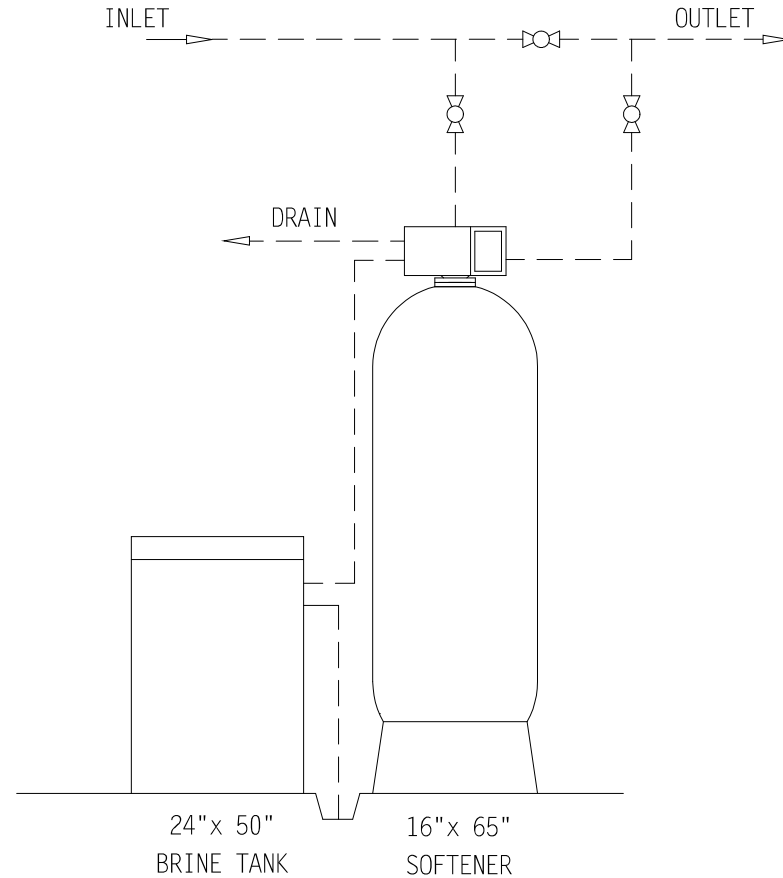

DO NOT SCALE DRAWING

THIS DRAWING IS ISSUED IN CONFIDENCE AND CANNOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN OR REFERRED TO WITHOUT DIRECT WRITTEN PERMISSION FROM NELSEN CORPORATION.

		NELSEN CORPORATION 3250 BARBER RD. 5701 W. LATHAM ST. #107 NORTON, OH 44203 PHOENIX, ARIZONA 85043 1-800-362-9686 1-866-445-4299	
GENERAL ARRANGEMENT DWG. SOFTENER 120K SYSTEM 4-TIMECLOCK			
DRAWN BY:	RANDY A. MINOR II	DWG. NO.	
DATE:	07-11-06	MT285/17T-120	
CHECKED BY:	R. GARRETT		
PAGE 1 OF 1	REV: 05-17-07		